

Teleskopcylinder

Teleskopcylinder med kugleende
VT127/5/1700




Slaglængde: 1700 mm

Tipevne: 9000 kg

Trin: 5

L min. 517 +
slaglængde 1700

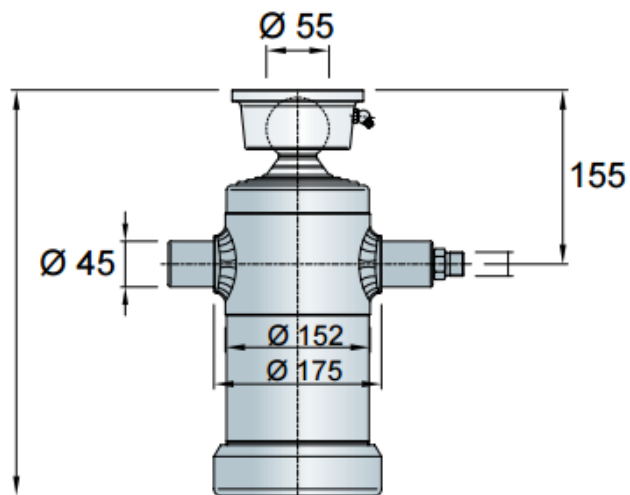


Alle mål i mm.

Portata in kg. per ogni singola sfilata - Thrust in kg. for single extension -
Charge en kg. pour chaque expansion

Pressione di esercizio **180 Bar** con punte massime di 180 Bar.

Rated pressure **180 Bar** reaching maximum point of 180 Bar.

Pression d'utilisation **180 Bar**, pression maximum 180 Bar.

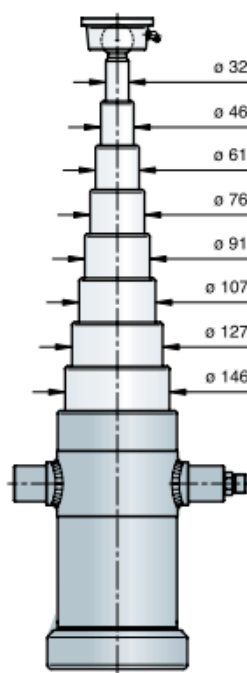

Press. Bar	ø 146	ø 127	ø 107	ø 91	ø 76	ø 61	ø 46	ø 32
100	16,730	12,660	8,980	6,500	4,530	2,920	1,660	800
125	20,910	15,820	11,230	8,120	5,660	3,650	2,070	1,000
160	26,770	20,250	14,370	10,400	7,250	4,670	2,650	1,280
180	30,110	22,790	16,170	11,700	8,160	5,250	2,980	1,440

De aktuelle data i skemaet er markeret med gult.