




Hydraulic Brake for MR Motor

LB-288-43-C-C

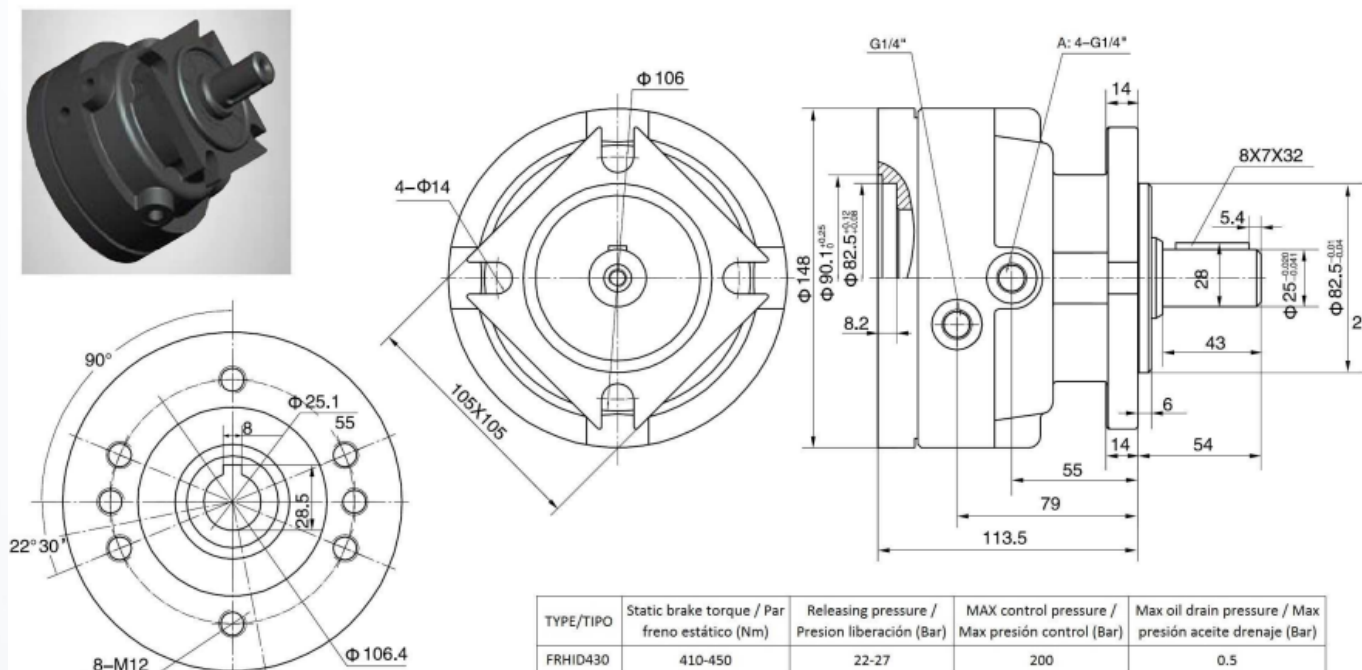

The brake is normally activated, and it gets released when pressure exceeds releasing pressure.

The brake needs to be filled with oil before first use (50-100ml, ports A)

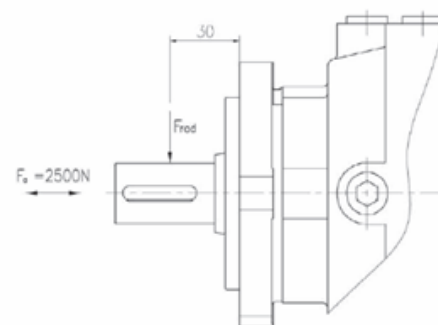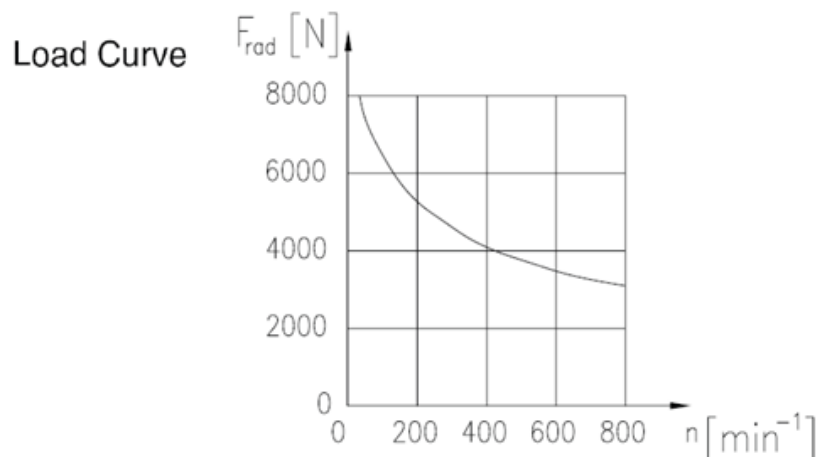

Max. torque: 430 Nm