
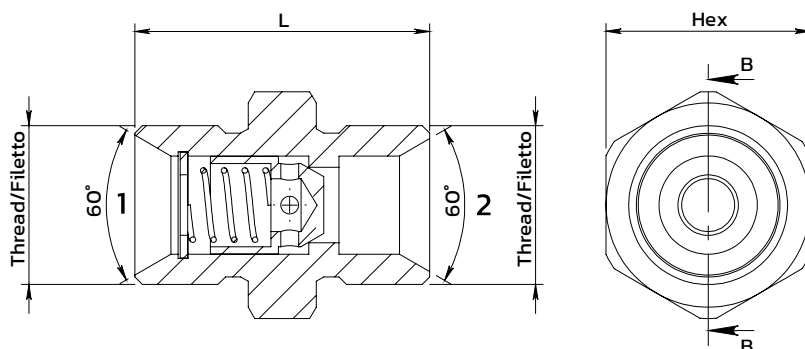


Check valve male male nipple


Valvola unidirezionale raccordo maschio maschio



SPECIFICATIONS / SPECIFICHE

Fluid viscosity / Viscosità Fluido	ISO 3448
Filtration / Classe di contaminazione	ISO 4406
Fluid temperature / Temperatura fluido	-20°C +90°C
Ambient temperature / Temperatura ambiente	-20°C +50°C
External surfaces / Superfici esterne	Zinc plated/Zincate

PERFORMANCE / PRESTAZIONI

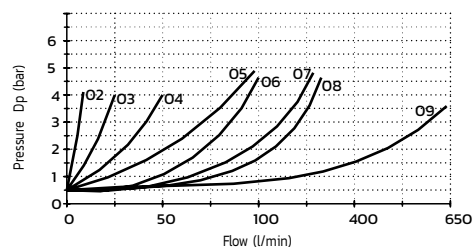Oil viscosity 24 mm²/s (3.5 °E) - Temperature 50°C

ORDERING CODE / CODICE ORDINAZIONE

13	N	01	MO1	3	O	**	*
----	---	----	-----	---	---	----	---

Cracking pressure		
	Until 1"	From 1" 1/4
X	1 bar	1 bar
Y	3 bar	6 bar
Z	6 bar	9 bar

Ports size	
02	1/4 BSPP
03	3/8 BSPP
04	1/2 BSPP
05	3/4 BSPP
06	1" BSPP
07	1" 1/4 BSPP
08	1" 1/2 BSPP
09	2" BSPP

Standard code	Thread	L	Hex	Weight (kg)	Max. Flow (l/m)	Max. Pressure (bar)
13N01MO13002X	1/4	32	19	0.033	8	350
13N01MO13003X	3/8	34	22	0.053	20	350
13N01MO13004X	1/2	39	27	0.092	50	350
13N01MO13005X	3/4	45	32	0.142	90	350
13N01MO13006X	1"	55	40	0.288	90	320
13N01MO13007X	1" 1/4	70	50	0.594	250	320
13N01MO13008X	1" 1/2	86	55	0.910	300	320
13N01MO13009X	2"	102	70	1.800	650	320

* On request versions: Please, contact our customer service / Versioni su richiesta: Per cortesia contattare il ns. servizio clienti.