
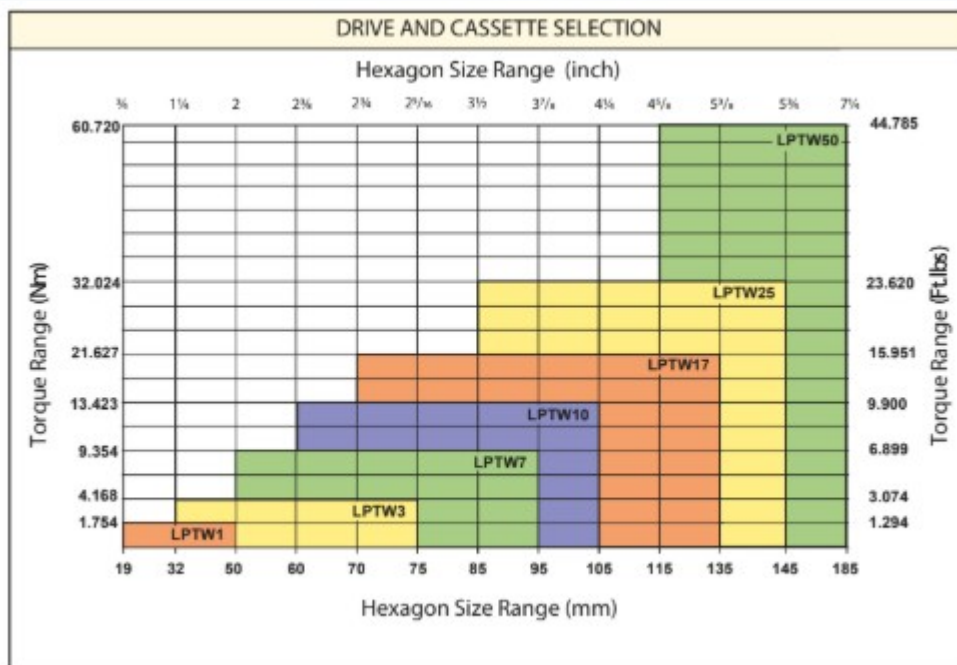


Low Profile Torque Wrench

LPTW

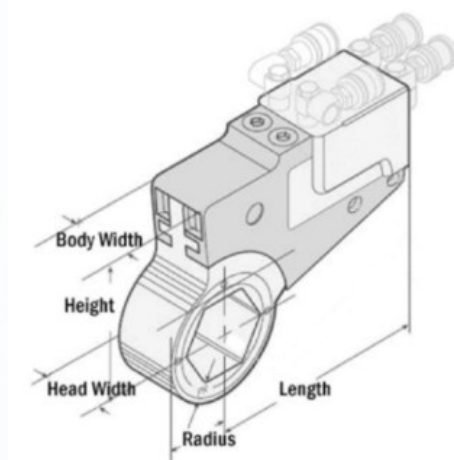

Part no	Hex Range Min/Max (mm)	Hex Range Min/Max (inch)	MIN FT./ LBS. @10,000 PSI	MAX FT./ LBS. @10,000 PSI	MIN NM @700 bar	MAX NM @700 bar	Length (mm)	Height (mm)	Body width (mm)	Head width (mm)	Range (mm)	Weight with Head (kg)
LPTW1	19 - 50	3/8"-2"	117	1.294	159	1.754	159	102	28	24	19 - 51	3,3
LPTW3	32 - 75	1 1/4"-2 5/8"	294	3.074	399	4.168	178	146	37	30	32 - 75	4,2
LPTW7	50 - 95	2"-3 3/8"	667	6.899	904	9.354	235	159	38	38	51 - 95	6,4
LPTW10	60 - 105	2 3/8"-4 1/4"	990	9.900	1.342	13.423	248	203	50	50	60 - 105	11,1
LPTW17	70 - 135	2 3/4"-5 3/8"	1.513	15.951	2.051	21.627	286	235	50	62	70 - 135	19,1
LPTW25	85 - 145	3 1/2"-5 3/4"	2.260	23.620	3.064	32.024	286	235	74	75	86 - 145	25,9
LPTW50	115 - 185	4 5/8"-7 1/4"	3.475	44.785	4.711	60.720	391	267	74	75	115 - 185	38,6

TAON Hydraulic Components ApS are specialists in hydraulic solutions, components and tools.

• +45 24 48 84 80 • info@taon.dk • www.taon-hydraulic.com

© TAON Hydraulic will always help you find the best solution.