

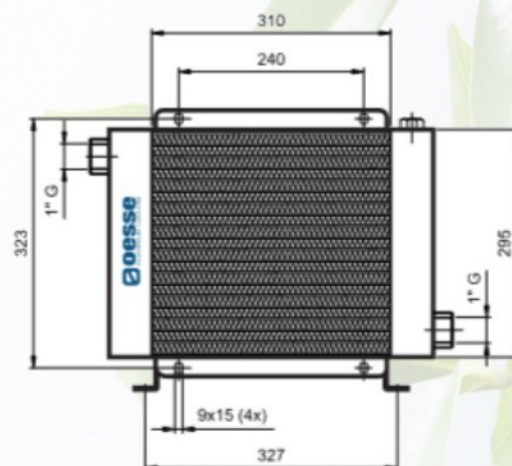


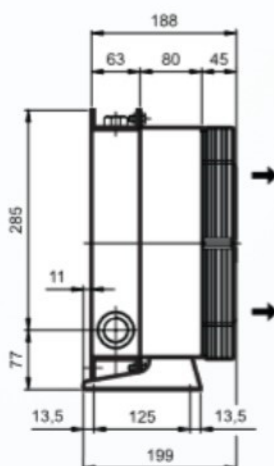


HY 024

230
Volt

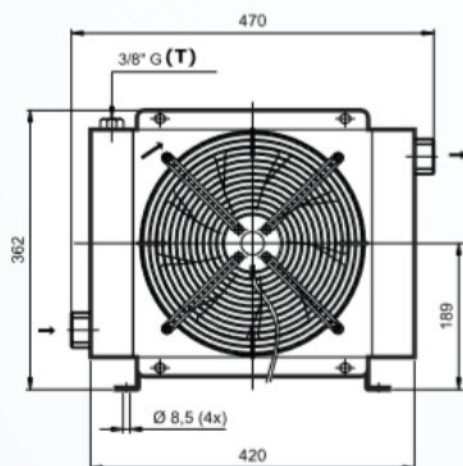


Dati Tecnici / Technical information / Technische Daten

Type	Oil flow	Capacity	Weight	Voltage	Frequency	Current	Power	Fan Ø	Air flow	Noise Level
	l/min	l	kg	V	Hz	A	W	mm	m³/h	dB(A)
90039	30 - 120	3,7	11,4	230	50/60	0,43/0,52	100/120	250	1400	70

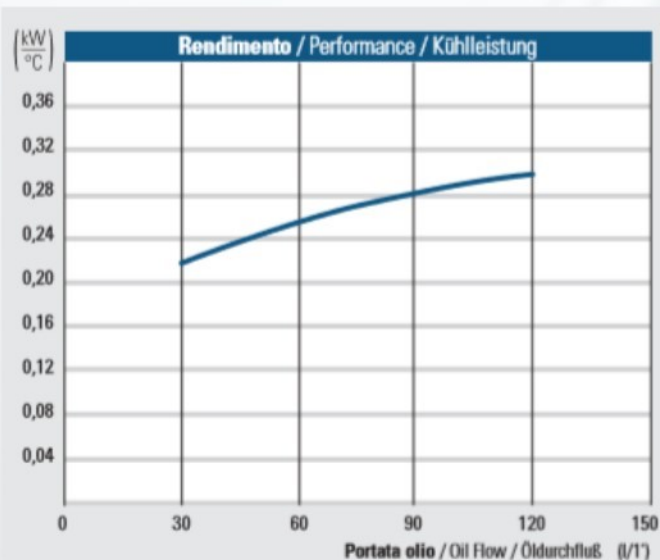

1 kW = 860 Kcal/h - 1 kW = 635 HP

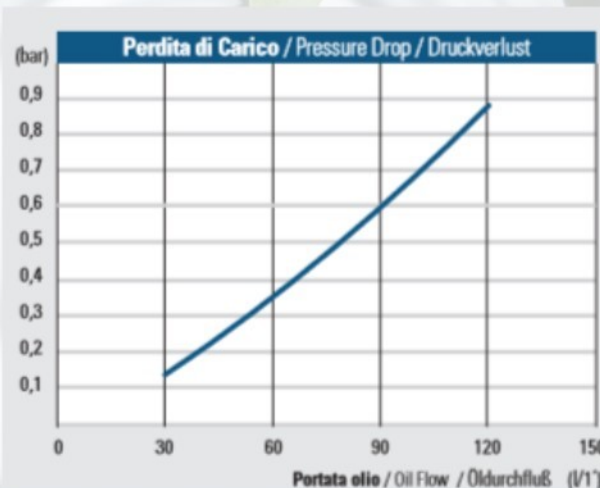

Correzione viscosità - Viscosity correction - Viskositätskorrektur

Olio - Oil - Öl: ISO VG @ 40 °C
 Moltiplicare per - Multiply for - Multiplizieren mit:

22	32	46	68	150
0,7	0,9	1	1,1	2



TAON Hydraulic Components ApS are specialists in hydraulic solutions, components and tool.

TAON Hydraulic Components ApS • +45 24 48 84 80 • info@taon.dk • www.taon.dk

© TAON Hydraulic will always help you find the best solution.