



8ZC70 Series Solenoid Operated Valves

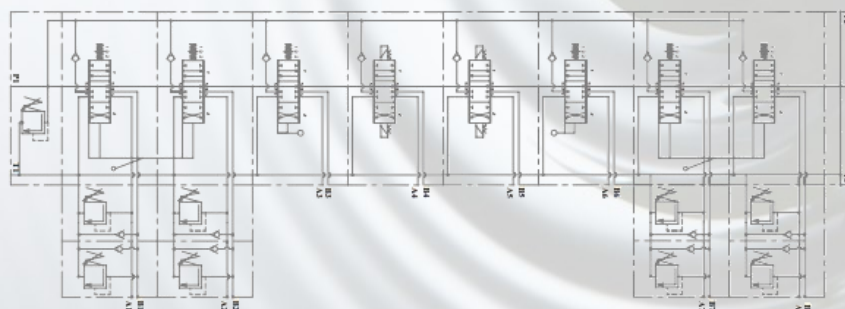

Port threads:
 Port P - BSP G 1/2"
 Port A, B - BSP G 1/2"
 Port T2, T3 - BSP G 3/4"
 Port T1 - BSP G 1/2"
 Port N - BSP M26x1,5

Nominal flow rate: 70 l/min
 Operating pressures:
 @ port P - 250 bar
 @ port A, B - 300 bar
 @ port T - 35 bar

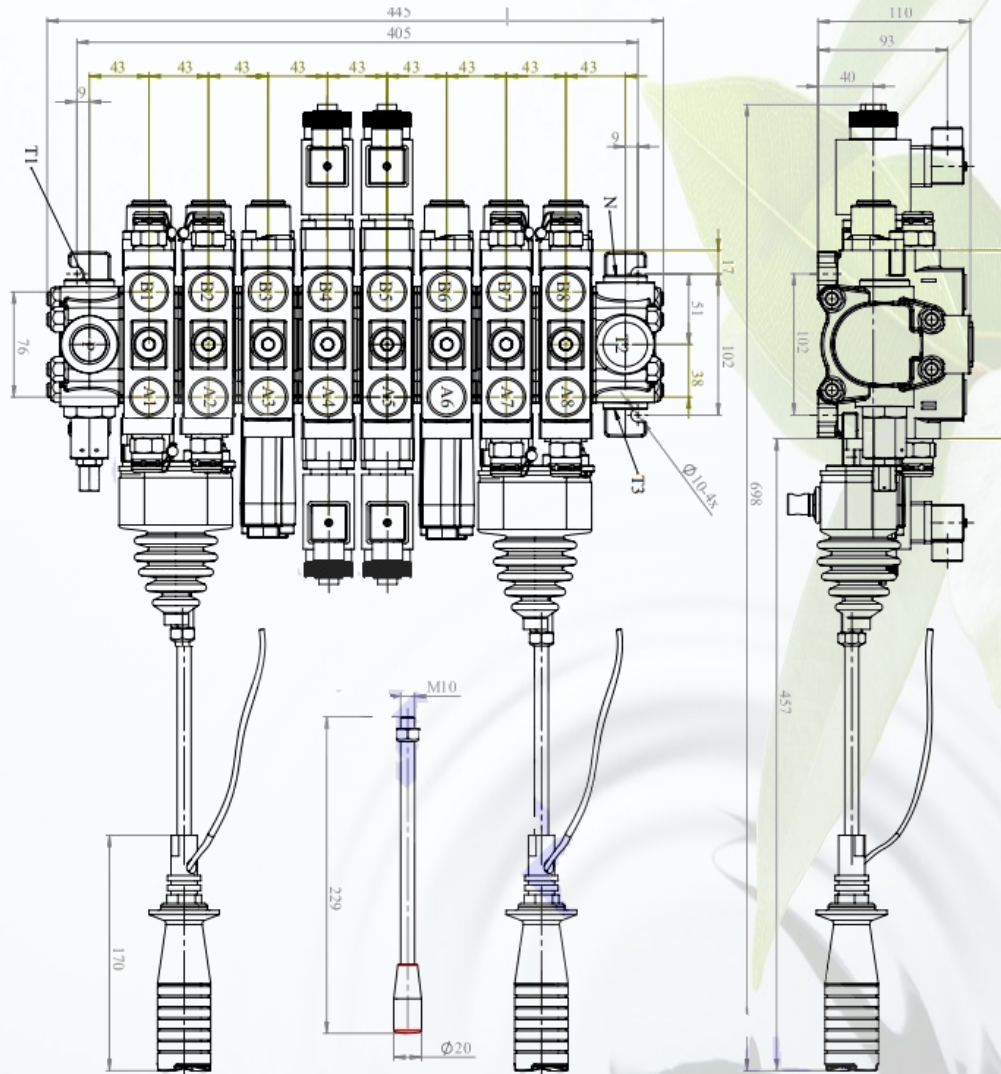

TAON

Hydraulik Komponenter

TAON Hydraulic Components ApS are specialists in hydraulic solutions, components and tools.

• +45 24 48 84 80 • info@taon.dk • www.taon-hydraulic.com

© TAON Hydraulic will always help you find the best solution.