

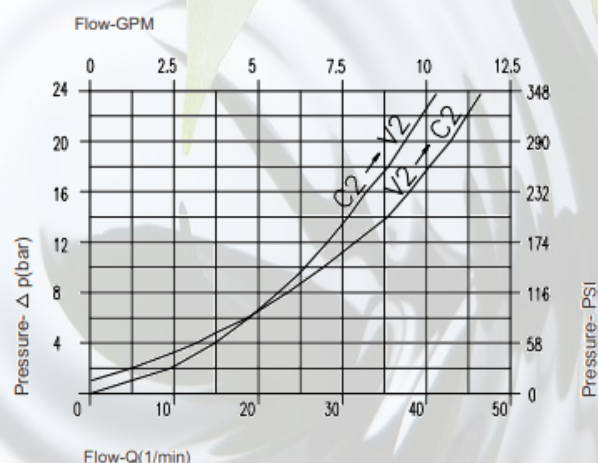


Double Counterbalance—NG06

HSN01.226.0X0A

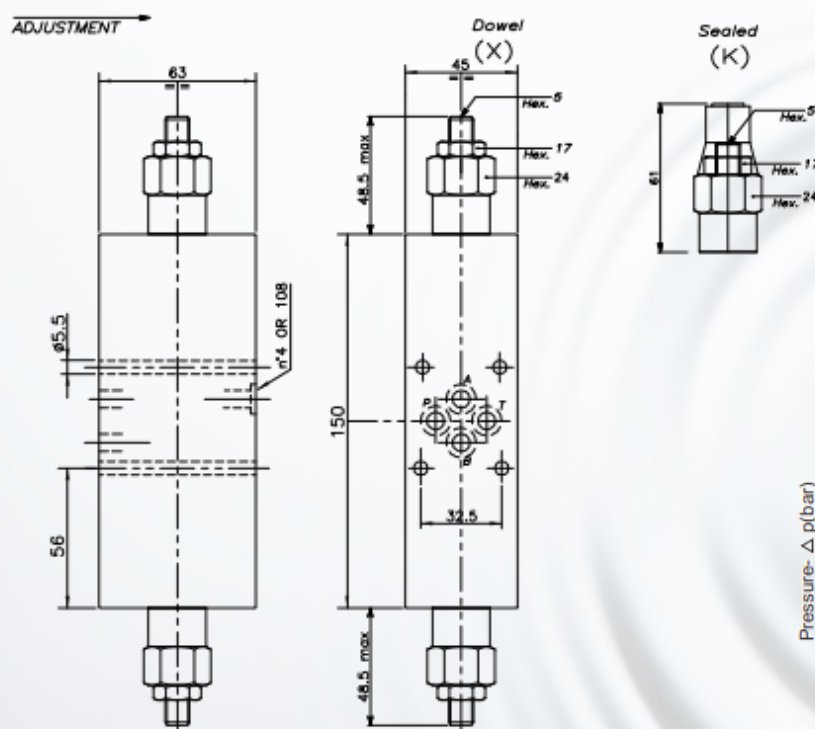

Performance	
Rated size	DN 6
Max. flow rate	1 l/min
	50 l/min
Max. peak pressure	350 bar
Max. setting pressure	350 bar
Standart pilot ratio	4.25:1
Room temperature	-30°C + 50°C
Oil temperature	-30°C + 80°C
Recommended filtration	30 micron
Weight	2.6 kg

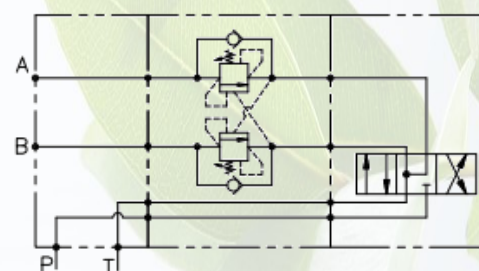

TAON

Hydraulik Komponenter

TAON Hydraulic Components ApS are specialists in hydraulic solutions, components and tools.

• +45 24 48 84 80 • info@taon.dk • www.taon-hydraulic.com

© TAON Hydraulic will always help you find the best solution.