
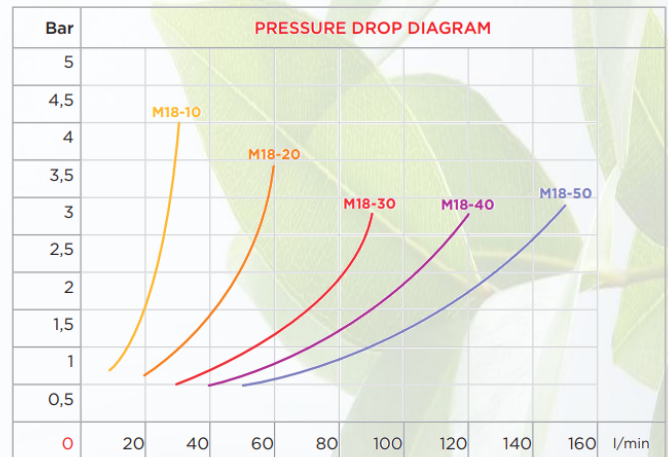



# Hydraulic oil cooler for water

M18

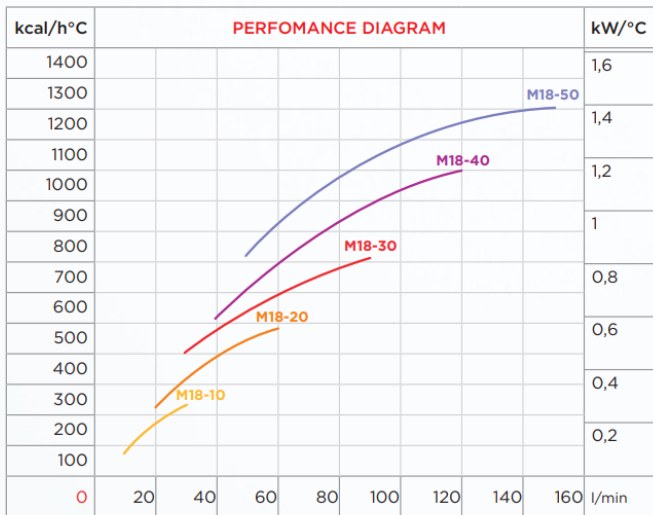

**CORRECTION FACTOR**

cSt	22	30	46	68	100	150	220
f	0,4	0,6	1	1,5	2,3	3,3	4,6

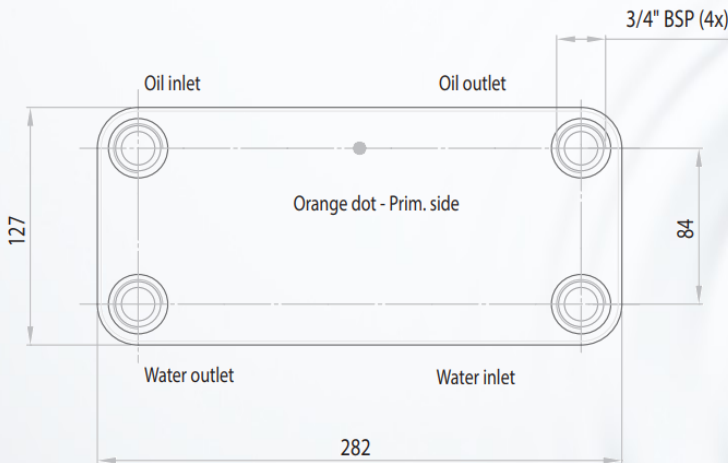

Type	Surface m <sup>2</sup>	Oil flow l/min	Cooling capacity kW/°C	Weight Kg	Dimensions A
<b>M18-10</b>	0.195	10÷30	0.09÷0.27	2.5	28
<b>M18-20</b>	0.390	20÷60	0.25÷0.55	3.7	47
<b>M18-30</b>	0.585	30÷90	0.45÷0.83	4.8	66
<b>M18-40</b>	0.780	40÷120	0.60÷1.17	6.0	85
<b>M18-50</b>	0.975	50÷150	0.85÷1.40	7.2	104



TAON Hydraulic Components ApS are specialists in hydraulic solutions, components and tool.

TAON Hydraulic Components ApS • +45 24 48 84 80 • info@taon.dk • www.taon.dk

© TAON Hydraulic will always help you find the best solution.