


Hydraulic gear pump—Gr. 2

20A(C)..X006

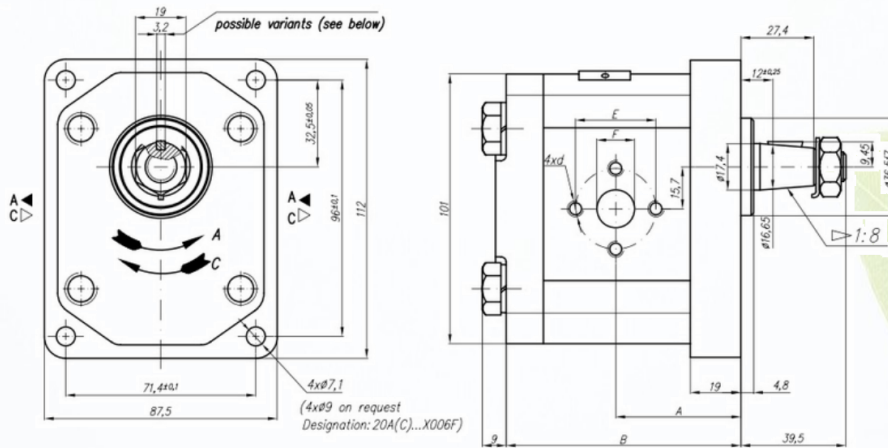

Model	Displacement	Flow		Pressure	Max. Speed	Dimensions							
	cm ³ /rev	@ 1500 rpm. L/ min.	@ max. rpm L/min	pnom bar	n rpm	A mm	B mm	Inlet			Outlet		
								E	F	d	E	F	d
20A(C)4.5X006	4.5	6.4	14.33	250	3500	42.5	80	30.2	13.1	M6-6H	30.2	13.1	M6-6H
20A(C)6.3X006	6.3	8.69	20.29	250	3500	42.5	80						
20A(C)8.2X006	8.2	11.32	26.4	250	3500	42.5	80						
20A(C)10X006	10	13.95	32.55	250	3500	47	89	39.7	19	M8-6H	30.2	14.2	M6-6H
20A(C)11X006	11	15.76	36.78	250	3500	48	91.1						
20A(C)12X006	12	16.92	39.48	250	3500	48.6	92.3						
20A(C)14X006	14	19.95	46.55	250	3500	50	95.4						
20A(C)15X006	15	21.6	36	250	2500	51	96.9						
20A(C)16X006	16	23.04	38.4	250	2500	52	98.6						
20A(C)19X006	19	27.36	45.6	200	2500	54	103.5						
20A(C)22X006	22	31.68	42.24	180	2000	57	108.5						
20A(C)25X006	25	36	48	160	2000	59.2	113.4				39.7	19	M8

TAON

Hydraulik Komponenter

TAON Hydraulic Components ApS are specialists in hydraulic solutions, components and tools.

• +45 24 48 84 80 • info@taon.dk • www.taon-hydraulic.com

© TAON Hydraulic will always help you find the best solution.